

MULTIGREASE

MULTIPURPOSE GREASE SPRAY

CHARACTERISTICS

Base:	Mixture of oils and greases with high lubrication power
Aspect:	Yellow lubricant with high viscosity
Propellant:	Denaturated and odourless hydrocarbon (VOC Free)
Temperature:	-10/+ 210°C
Water:	High resistance to water
Oxidation:	High resistance
CFC free	

PROPERTIES

- High lubrication power.
- High penetration grease.
- High resistance to flushing out and to atmospherical agents.
- High resistance to oxidation
- It contains an EP (Extreme Pressure) additive.

DESCRIPTION

Multipurpose lubricant grease with high adhesivity, it is resistant to high traction, specially formulated to lubricate mechanical joints. It resists to water and to atmospherical agents. Working temperature between -10°C up to +210°C.


Particularly used as lubricant for industrial chains of assemblage, machine for printing plastic subjects, thorns, reduction gears, guides, extractor, mechanical movements, gears, rails of drawers, locks, hinges, padlocks, component submitted to strong sollicitation, eddies, chains of motion and mechanical parts in movement that need to be lubricated with a very adhesive product.

INSTRUCTIONS OF USE

Clean the surface to treat. Shake the can and spray the product from 15 cm distance. The little pipe allows to reach all position improving the efficaciousness of the product.

PACKAGING

Spray Aerosol ml 400
Box 12 Aerosol
Product Code 13410/04GM

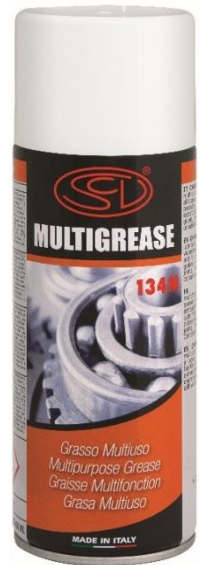

Revision date 01.08.2016

The information and recommendations contained in this document is offered in good faith based on our current knowledge and belief accurate at the date of publication. Nothing herein is to be considered as a warranty, express or otherwise. In all cases, it is the responsibility of the user to determine the applicability of such information or the suitability of any products for their own particular purpose with local legislation and for obtaining the necessary certifications and authorisations. Siliconi Commerciale's sole warranty is that the products will meet its sales specification. The manufacturer cannot be held responsible in case of damages caused by incorrect use of the product.

® indicates a Registered TradeMarks of Siliconi Commerciale. All Rights Reserved.

SILICONI COMMERCIALE® Technical data- sheet

